

Backbone of Infrastructure

World Class Premium TMT BARS





We are leading partners in changing the face of Indian infrastructure.

When every bar of steel we produce is of the highest quality, is it any wonder the structures created are spectacularly long lasting?

Approved by













INDIAN SPACE RESEARCH **ORGANISATION**

NATIONAL **AUTHORITY** **NUCLEAR POWER** CORPORATION OF INDIA LTD.
















ELECTRICALS

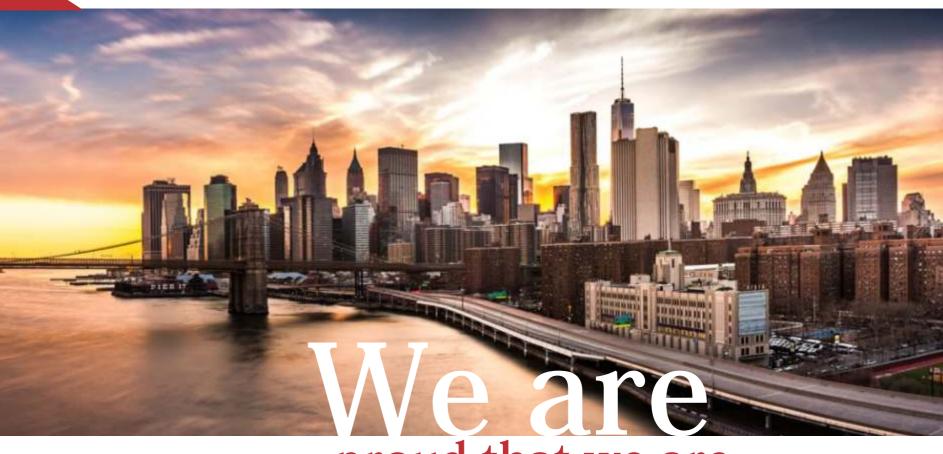

proud that we are

Pioneers in TMT Bar technology

of Tamil Nadu

TMT bar producers **Proud** recipients of Safety Award from the Government

South India's **Most Awarded TMT Brand**

A company with the largest consumer base in over 6 states

One of the Leading **Primary Steel Producers**

German **Rolling Mill** + German QST **Technology**

Special length and Cut to length specialists

Trusted by leading houses such as: TATA, ADANI, L&T, WIPRO,

One among

India's Largest

GODREJ and many more

DELHI METRO RAIL

CORPORATION LIMITED



BHEL

Exceeding, Surpassing, Benchmark- Just some of the



We craft our TMT Bars with great care and precision in South India's first and largest fully dedicated, fully-integrated TMT Rebar plant spread over 250 acres. We are the only brand in South India with 0.5 million tons capacity dedicated to TMT Bars.

Our whole process of TMT bar manufacture is housed in a single compound ensuring continuous process for unmatched quality. The most advanced technology from Germany and sophisticated machinery are employed in the manufacture of the bars. Our patented Slit Technology, which requires the highest quality raw materials, allows the production of 3 bars at a time. The technology enables us to manufacture batches of 500 bars of 8mm ensuring best consistency in quality. This consistency is impossible to match by other technologies which allow manufacture of only 100 bar batches. The rolling is carried out in an elevated floor level to eliminate dust, thus ensuring impeccable surface quality. The bars are cooled naturally and finally packaged. The entire process from feeding raw material to packaging is automated.

State of the art Robotic Tamper proof testing equipments ensure we deliver what we promise.

BLOOM The heart of high quality steel bars.

The finest raw material is processed to form Blooms, which is the source of high quality TMT bars. Bloom of sizes, 12mtr 160x160 sq. cm., is used only by Primary Steel Manufacturers. This results in better quality steel compared to secondary manufacturers using 6mtr billet of 100 x 100 sq. cm.,

DOUBLE GERMAN TECHNOLOGY

100 % Automatic German Rolling Mill Latest German Thermex QST technology

While the average billet size is 16 sq. inches and weigh 500 kg. Kamachi blooms are of 40 sq. inches size and weighs 2500 kg.

Bloom makes better steel than billets because:


- Bloom is 5 times heavier than billets*
- Bloom is 500% more consistent
- Bloom has better grain structure
- Slower heat loss of blooms ensures higher uniform quality across the bar





Our Steel is UNIQUE

Because we have what very few have:








Fully Automated Process



In-depth Testing and Tracking



Single factory production No outsourcing

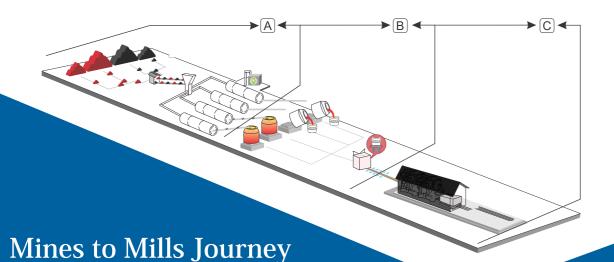

The journey of iron ore from processing to sponge iron production takes place in-house. Our dynamic process that transforms virgin iron ore to world's finest TMT Rebars involves:



Virgin and high grade DRI (Direct Reduced Iron) is procured, processed and cast in blooms in the largest facility in the state.




Consistent Raw Material quality.

Largest in State.



Iron ore processing.

Largest in state.




Highest grade raw material

B Advanced Blooms / Manufacturing /

The best steel refining process employs induction, liquid refining furnaces and world class bloom casters.







Steel refining at its best



PLC controlled Bloom casters



100% German Automatic Rolling Mill and German Thermex QST Technology roll out highest quality TMT bars.



100% German Automatic Rolling Mill



German Thermex QST technology




Refined World-Class TMT Bars

Quality & Finish

Robotic Notching machines provide perfect Rib Dia, Thickness and Height Notch to the bars, which are then tested by tamper proof Setmagan and Sepctro machines and given batch codes for traceability.



Perfect Rib Dia, Thickness, Height notched through Robotic Notching machines



Tamper proof Setmagan, Spectro + physical testing lab



Batch Coding & Traceability for every bar

The transformation from virgin iron ore to strong, safe, consistent and ductile TMT Rebars is complete.

Why we are Unique



State-of-the-art Technology

Electric induction and liquid refining furnace melts highest grade DRI to form highly durable Blooms. World-Class German technology ensures exceptional steel core formation. The production process combined with Vertical-Horizontal stand mill technology ensures fully automated, uniformly shaped TMT Rebars.



Extraordinary Consistency, Exceptional Steel

Simultaneous production of three 8mm bars with advanced slit technology that enables high consistency. This is made possible by exclusive usage of premium quality blooms and double German technology.




In-depth Testing and Tracking

Fully-automated monitoring systems certify the quality of every bar. Furthermore, each one of them can be backtracked to the specific heat and quality of the original high-grade blooms.



First Rate Raw Material, Finest quality Steel

Our blooms are made from high grade DRI (Direct Reduced Iron) resulting in pure steel that speaks for itself. These blooms are best both in terms of Chemical properties and dimensions.



Remarkable Surface Finish

Modernized cooling-bed at 5m elevation grants even cooling and the Online Pressurized descaler together produce a polished surface across the entire length of every bar.

How Kamachi TMT Rebars are superior

| KAMA | YOU GET | |
|----------------------|--|---|
| IRON ORE | Uses virgin iron ore and deploys state-of-the-art steel making and refining process | Highly clean & homogenous steel quality |
| DRI-EIF-LRF-CCM | Steel is made using DRI - EIF - LRF CCM route | A highly controlled steel chemistry with very low levels of sulphur & phosphorus |
| UNIQUE POSITION | Only brand in South India with 0.5 million tons capacity like main steel plants. | Prime quality at secondary market prices |
| UNIFORM RIB PATTERN | Provides precise and uniform parallel rib pattern engraved through computer controlled Robot notch making machines | Excellent bond strength with concrete |
| EARTHQUAKE RESISTANT | Exceeds UTS/YS (Ultimate Tensile strength to yield strength) ratio and high percentage elongation | Superior earthquake resistant qualities due to high capability of absorbing energy |
| SURPASSES STANDARDS | Higher than minimum specified level of Bureau of Indian Standard(BIS) | More value for money |
| UNIFORM PRICES | Has predefined and transparent pricing | Fixed and uniform rates |
| TRUSTWORTHY | Is a Renowned & Award winning Brand | World Class Quality |

TMT bars range



Minimum 10% higher strength than BIS standards and 15% more economical than ordinary TMT bars. Has excellent elongation, bend and re-bend properties and superior weldability

Chemical Properties

Carbon % max 0.25 Sulphur % max 0.050 Phosphorus % max 0.050

Mechanical Properties

Yield stress 525 Ultimate Tensile Stress 600



Low levels of Sulphur and Phosphorus impurities afford extra ductility and better ability to withstand the tremendous shock loads produced during earthquakes. Kamachi Fe500D bars are trusted by leading industrial houses.

Chemical Properties

Carbon % max 0.25 Sulphur % max 0.035 Phosphorus % max 0.040

Mechanical Properties

Yield stress 525 Ultimate Tensile Stress 600





Sea water, acidity in the air or salinity in the ground water causes corrosion weakening RCC structures. Kamachi Fe500D HCRM, with corrosion resistant elements Copper(Cu) and Chromium(Cr) present uniformly from the core to the surface, fights corrosion, maintains structural strength over time prolonging the life of RCC structures.

The price difference is Rs.3000/- compared to normal Fe500. This onetime cost translates into just Rs 200/- per year increase as against phenomenal savings enabled by avoiding foundation re-strengthening and annual maintenance costs required for normal Fe500 structures starting as early as 15 years after completion.

Furthermore, our HCRM has a higher percentage of corrosion resistant elements and is more economical than other leading brands. So we deliver better quality at a lesser rate.

Chemical Properties

Chromium 0.30% min Copper 0.20% min Total Corrosion

Resistant Elements 0.50% min

Mechanical Properties

Yield stress 525 Ultimate Tensile Stress 600



Fe600 is a pioneering introduction by Kamachi. A steel strength of 600 MPa, 20% increase in load bearing capacity and up to 4% lower steel consumption makes our Fe600 the most economical TMT bars for new age high-rises. Better ductility due to extremely low sulphur and phosphorus content makes it strong enough to withstand heavy winds and jerk loads during earthquakes.

Priced at HCRM rates, Fe600 bars offer considerable saving due to less steel consumption. So, maximum value for money.

Chemical Properties

Carbon % max 0.25
Sulphur % max 0.035
Phosphorus % max 0.040

Mechanical Properties

Yield stress 630 Ultimate Tensile Stress 670

Chemical & Mechanical Properties of TMT rebars

| REBAR GRADE (%) | BIS 500 | Kamachi 500 Typical Values | BIS FE 500D | Kamachi 500D Typical Values | Kamachi FE 500D HCRM Typical Values | BIS FE 600 | Kamachi FE 600 Typical Values |
|--|---------|----------------------------------|----------------|-----------------------------------|---|---------------|-------------------------------------|
| Carbon | 0.30 | 0.25 | 0.25 | 0.20-0.25 | 0.15 | 0.30 | 0.25 |
| Silicon | | 0.15-0.25 | | 0.15-0.25 | 0.35 | | 0.15-0.25 |
| Manganese | | 0.55 | | 0.90-1.00 | 0.80 - 1.00 | | 0.95-1.05 |
| Sulphur (MAX) | 0.055 | 0.050 | 0.040 | 0.035 | 0.040 | 0.040 | 0.035 |
| Phosphorus (MAX) | 0.055 | 0.050 | 0.040 | 0.040 | 0.090 | 0.040 | 0.040 |
| Sulphur + Phosphorus (MAX) | 0.105 | 0.100 | 0.075 | 0.070 | 0.130 | 0.075 | 0.075 |
| Carbon Equivalent (CE) MAX | 0.42 | 0.32-0.38 | 0.42 | 0.31-0.36 | 0.53 | 0.42 | 0.42 |
| Copper | | | | | 0.20 - 0.30 | | |
| Chromium | | | | | 0.40 - 0.50 | | |
| Yield Stress (N/mm²) MIN | 500 | 525 | 500 | 525 | 525 | 600 | 630 |
| Elongation (MIN) | 12 | 16 | 16 | 18 | 18 | 10 | 11 |
| Ultimate Tensile Strength (N/mm²) MIN | 545 | 600 | 565 | 600 | 600 | 660 | 670 |
| UTS/YS Ratio | 1.08 | 1.1 | 1.10 | 1.15 | 1.15 | 1.06 | 1.06 |

Size range

Kamachi TMT Rebars are available in the following sizes as per: 1786-2008 for Concrete Reinforcement

| Dia (mm) | Minimum Weight | Nominal Weight | Maximum Weight | length Per Rod | Typical Weight Per Rod |
|-------------|-------------------|-------------------|-------------------|-------------------|---------------------------|
| | (kg/mtr) | (kg/mtr) | (kg/mtr) | (mtr) | (kg) |
| 8 | 0.367 | 0.395 | 0.423 | 12 | 4.740 |
| 10 | 0.574 | 0.617 | 0.660 | 12 | 7.404 |
| 12 | 0.844 | 0.888 | 0.932 | 12 | 10.656 |
| 16 | 1.449 | 1.578 | 1.657 | 12 | 18.936 |
| 20 | 2.392 | 2.466 | 2.540 | 12 | 29.592 |
| 25 | 3.738 | 3.854 | 3.970 | 12 | 46.248 |
| 32 | 6.121 | 6.310 | 6.499 | 12 | 75.720 |
| 36 | 7.750 | 7.990 | 8.230 | 12 | 95.88 |
| 40* | 9.564 | 9.860 | 10.155 | 12 | 118.32 |

The rebars are delivered in standard length of 12mtr bundles ensuring ease in transportation. 56mm can be manufactured for specific heavy orders.

Readymade Money Savers



Readymade Steel – Quality, Reliability, Speed and Efficiency.

The application of technology to any process achieves accurate control on all required parameters. Processing steel at the job site is hard, disorganized and less productive. The emerging trend is to shift steel processing to service centers, which offer a controlled environment. Readymade steel processed at our factory saves money through reduction of time and manpower. Readymade steel accelerates construction time and helps construction firms tide over scarcity of skilled labour, stringent timelines and quality standards while adhering to health and safety guidelines.



ADVANTAGES OF READYMADE STEEL

Time Saving

Elimination of onsite labour with delivery of customized readymade steel coordinated to construction requirements saves processing time.



There is no wastage of steel as there is no onsite processing. The customer only pays of the actual steel used, blueprint weight, saving on waste, processing and freight.



Material is ordered and delivered as per need eliminating the need for storage. There is no loss due to theft of stored steel.



Advanced robotic technology is used in the processing of steel. This helps achieve accurate control over all required parameters for superior quality.



The steel bars are bent using the latest technology in a controlled factory environment. This achieves absolute accuracy.



Mechanized processing enables us to customize shapes and designs as per requirement. This provides absolute freedom of design.









^{*}Available upon prior agreement before ordering

^{**}Mentioned values observed typical of 90%

Our Other Products





Chemical & Mechanical Properties

| MS Round Bar | ISI | Kamachi |
|-------------------|--------------|---------|
| GRADE E-250A | Values | Typical |
| | | Values |
| Carbon (max) | 0.23 | 0.20 |
| Silicon (max) | 0.40 | 0.30 |
| Manganese (max) | 1.5 | 8.0 |
| Sulphur (max) | 0.045 | 0.04 |
| Phosphorus (max) | 0.045 | 0.04 |
| Aluminimum (max) | 0.01 | 0.01 |
| Nitrogen (max) | 0.012 | 0.009 |
| Carbon Equivalent | | |
| (CE) | 0.42 | 0.35 |
| Yield Stress | | |
| (N/mm2) MIN | 240 | 300 |
| Elongation (MIN) | 23 | 32 |
| Tensile Strength | | |
| (N/mm2) min | 410 | 503 |
| Method of | Semi Killed/ | |
| Deoxidation | Killed | Killed |





Chemical & Mechanical Properties

| MS Square Bar | ISI | Kamachi |
|-------------------|--------------|---------|
| GRADE E-250A | Values | Typical |
| | | Values |
| Carbon (max) | 0.23 | 0.20 |
| Silicon (max) | 0.40 | 0.30 |
| Manganese (max) | 1.5 | 0.8 |
| Sulphur (max) | 0.045 | 0.04 |
| Phosphorus (max) | 0.045 | 0.04 |
| Aluminimum (max) | 0.01 | 0.01 |
| Nitrogen (max) | 0.012 | 0.009 |
| Carbon Equivalent | | |
| (CE) | 0.42 | 0.35 |
| Yield Stress | | |
| (N/mm2) MIN | 240 | 300 |
| Elongation (MIN) | 23 | 32 |
| Tensile Strength | | |
| (N/mm2) min | 410 | 503 |
| Method of | Semi Killed/ | |
| Deoxidation | Killed | Killed |

Awards and Recognitions







INDIAN POWER BRAND

INDIA'S NO.1 BRAND

INDIA'S MOST PROMISING BRAND 2015







SAFETY AWARD



INDIA'S MOST PROMISING **BRAND 2017**

Certified By















Trusted by

































Kamachi Industries Limited

Office: ABC Trade Centre, 3rd Floor, Old No. 50, New No. 39, Anna Salai, Chennai - 600 002. Tamil Nadu, INDIA. Tel: +91-44-42961100 Mail: sales@kamachitmt.com

Factory: Survey No. 86, 115-119,123 - 125, Pathapalayam Village, S.R. Kandigai Post, Gummidipoondi - 601201

www.kamachigroup.com www.kamachitmt.com

Contact:

Tamil Nadu ----- 96770 71117 Andhra — 82978 03344 Kerala — 90487 66611 Karnataka — 77769 12345 Pondicherry ——— 89399 40811 Goa ----- 98234 12121 Andaman & Nicobar - 95318 19853